


4 3/4" 5/6 4.0 Stages Model Number: 4755640



Motor Specification		Metric	Imperial
Total length	L	6312 mm	248.5 in
Max OD of Slick Motor	D	120 mm	4.75 in
Bit to Bent Point	Lb	1143 mm	45 in
Max OD of Stabilizer	Ds	197 mm	7.7 in
Bit to Center of Stabilizer Blade	Ls	450 mm	17.7 in
Estimated Total Weight		420 KG	926.1 lbs
Bit Size Range		149-200mm	5 7/8-7 7/8 in
Common Top Connection			3-1/2 REG Box
Common Bottom Connection			3-1/2 REG Box

Power Section Performance Data		
Flow Rate	400-1200 lpm	106-317gpm
Revs per Unit Volume	0.210 rev/l	0.795 rev/g
Speed Range	84-252rpm	
Std. Elastomer Max Diff Pressure	874 psi	6026 kPa
Std. Elastomer Torque @ Max Diff Pressure	2016 ft-lbs	2742 N.m
H-Torque Elastomer Max Diff Pressure	874 psi	6026 kPa
H-Torque Elastomer Torque @ Max Diff Pressure	2745 lbs-ft	3733 N.m

——— H-torque elastomer
 ——— Std. elastomer
 ——— Output torque

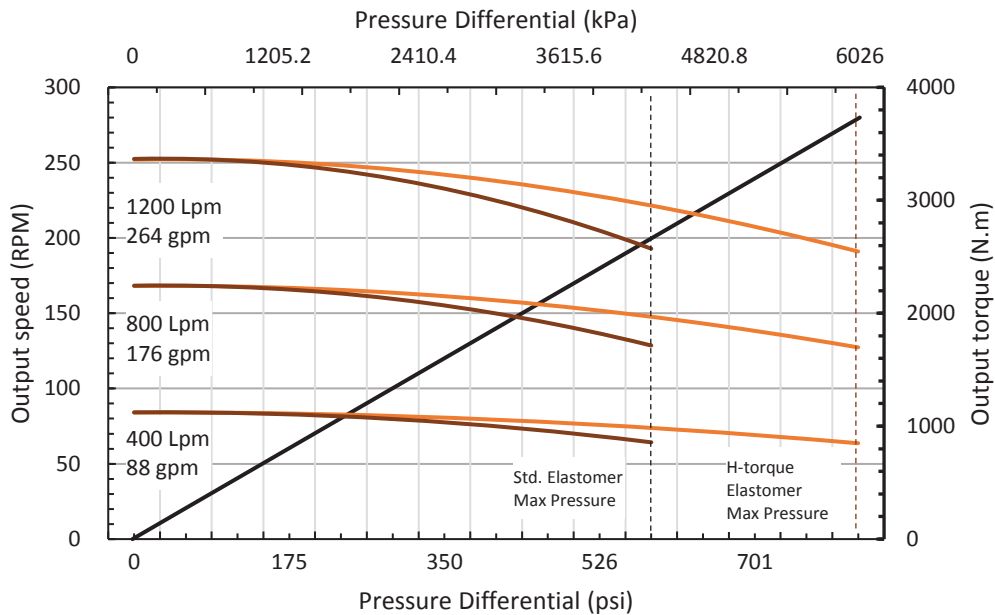

The performance curves are for reference only, there are some differences from the actual situation depending on the temperature, stator/rotor fit and mud. Performance data and dimensions subject to change without notice. The motor life will reduce rapidly if you operating a motor near or above maximum differential pressure.