


6 1/2" 5/6 5.0 Stages Model Number: 6505650



Motor Specification	Metric	Imperial
Total length	L	7596 mm / 299 in
Max OD of Slick Motor	D	165.1 mm / 6.5 in
Bit to Bent Point	Lb	1370 mm / 53.9 in
Max OD of Stabilizer	Ds	248 mm / 9.7 in
Bit to Center of Stabilizer Blade	Ls	680 mm / 26.7 in
Estimated Total Weight		1020 KG / 2249.1 lbs
Bit Size Range		171-222 mm / 8 3/8-9 7/8 in
Common Top Connection		4-1/2 REG Box
Common Bottom Connection		4-1/2 REG Box

Power Section Performance Data	
Flow Rate	1000-2500 lpm / 264-660 gpm
Revs per Unit Volume	0.105 rev/l / 0.4 rev/g
Speed Range	105-264 rpm
Std. Elastomer Max Diff Pressure	804 psi / 5543 kPa
Std. Elastomer Torque @ Max Diff Pressure	5354 lbs-ft / 7281 N.m
H-Torque Elastomer Max Diff Pressure	1097 psi / 7563 kPa
H-Torque Elastomer Torque @ Max Diff Pressure	7301 lbs-ft / 9929 N.m

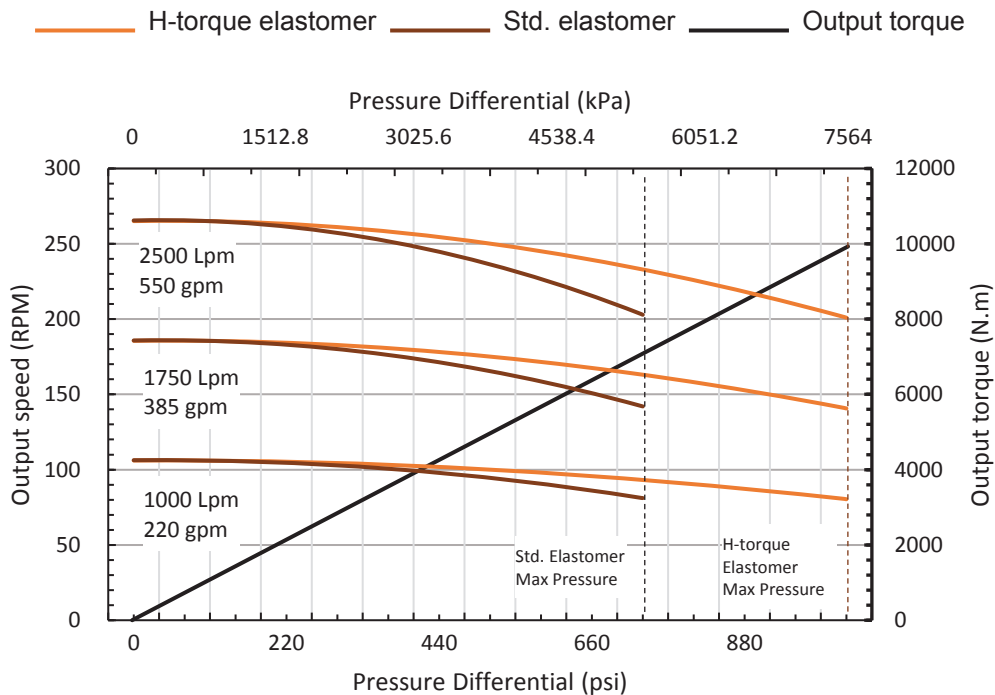

The performance curves are for reference only, there are some differences from the actual situation depending on the temperature, stator/rotor fit and mud. Performance data and dimensions subject to change without notice. The motor life will reduce rapidly if you operating a motor near or above maximum differential pressure.