


6 3/4" 5/6 4.0 Stages Model Number: 6755640



| Motor Specification | Metric | Imperial |
|-----------------------------------|--------|-----------------------------|
| Total length | L | 8300 mm / 326.7 in |
| Max OD of Slick Motor | D | 172 mm / 6.75 in |
| Bit to Bent Point | Lb | 1567 mm / 61.6 in |
| Max OD of Stabilizer | Ds | 248 mm / 9.7 in |
| Bit to Center of Stabilizer Blade | Ls | 556 mm / 21.8 in |
| Estimated Total Weight | | 1100 KG / 2425.5 lbs |
| Bit Size Range | | 213-251 mm / 8 3/8-9 7/8 in |
| Common Top Connection | | 4-1/2 REG Box |
| Common Bottom Connection | | 4-1/2 REG Box |

| Power Section Performance Data | |
|---|-----------------------------|
| Flow Rate | 1000-2500 lpm / 264-660 gpm |
| Revs per Unit Volume | 0.085 rev/l / 0.323 rev/g |
| Speed Range | 85-213 rpm |
| Std. Elastomer Max Diff Pressure | 641 psi / 4419 kPa |
| Std. Elastomer Torque @ Max Diff Pressure | 4868 lbs-ft / 6620 N.m |
| H-Torque Elastomer Max Diff Pressure | 874 psi / 6026 kPa |
| H-Torque Elastomer Torque @ Max Diff Pressure | 6638 lbs-ft / 9027 N.m |

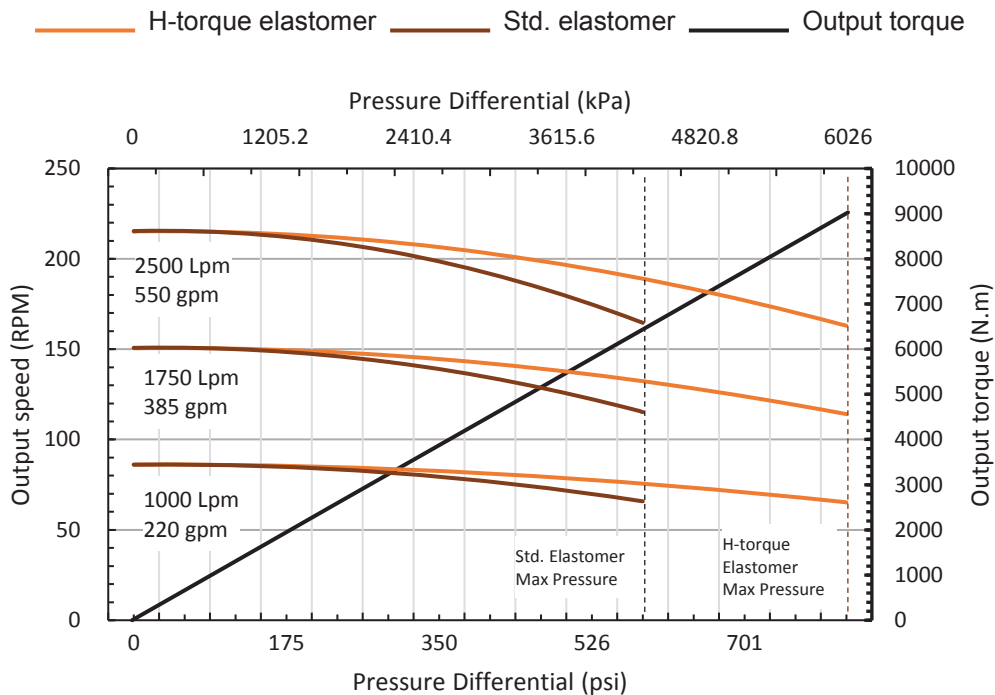

The performance curves are for reference only, there are some differences from the actual situation depending on the temperature, stator/rotor fit and mud. Performance data and dimensions subject to change without notice. The motor life will reduce rapidly if you operating a motor near or above maximum differential pressure.