


6 3/4" 7/8 4.5 Stages

Model Number: 6757845 (Suitable for RSS)



Motor Specification	Metric	Imperial
Total length	L	9600 mm / 377.9 in
Max OD of Slick Motor	D	172 mm / 6.75 in
Bit to Bent Point	Lb	1567 mm / 61.6 in
Max OD of Stabilizer	Ds	248 mm / 9.7 in
Bit to Center of Stabilizer Blade	Ls	556 mm / 21.8 in
Estimated Total Weight		1400 KG / 3087 lbs
Bit Size Range		213-251 mm / 8 3/8-9 7/8 in
Common Top Connection		4-1/2 REG Box
Common Bottom Connection		4-1/2 REG Box

Power Section Performance Data		
Flow Rate	1000-2500 lpm	264-660 gpm
Revs per Unit Volume	0.052 rev/l	0.197 rev/g
Speed Range	52-130 rpm	
Std. Elastomer Max Diff Pressure	717.9 psi	4949 kPa
Std. Elastomer Torque @ Max Diff Pressure	8045 lbs-ft	10941 N.m
H-Torque Elastomer Max Diff Pressure	979 psi	6750 kPa
H-Torque Elastomer Torque @ Max Diff Pressure	10790 lbs-ft	14674 N.m

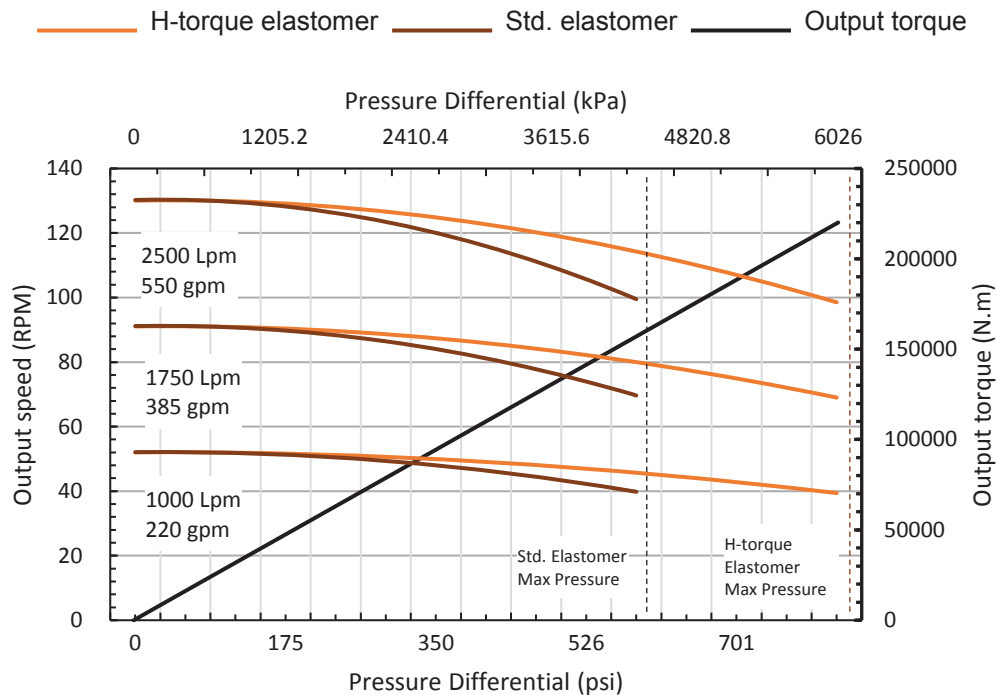

The performance curves are for reference only, there are some differences from the actual situation depending on the temperature, stator/rotor fit and mud. Performance data and dimensions subject to change without notice. The motor life will reduce rapidly if you operating a motor near or above maximum differential pressure.