


**6 3/4" 7/8 5.0 Stages**      Model Number: 6757850



Motor Specification	Metric	Imperial
Total length	L	8300 mm / 326.7 in
Max OD of Slick Motor	D	172 mm / 6.75 in
Bit to Bent Point	Lb	1567 mm / 61.6 in
Max OD of Stabilizer	Ds	248 mm / 9.7 in
Bit to Center of Stabilizer Blade	Ls	556 mm / 21.8 in
Estimated Total Weight		1310 KG / 2888.5 lbs
Bit Size Range		213-251 mm / 8 3/8-9 7/8 in
Common Top Connection		4-1/2 REG Box
Common Bottom Connection		4-1/2 REG Box

Power Section Performance Data	
Flow Rate	1000-2500 lpm / 264-660 gpm
Revs per Unit Volume	0.074 rev/l / 0.281 rev/g
Speed Range	74-186 rpm
Std. Elastomer Max Diff Pressure	804 psi / 5543 kPa
Std. Elastomer Torque @ Max Diff Pressure	7186 lbs-ft / 9772 N.m
H-Torque Elastomer Max Diff Pressure	1097 psi / 7563 kPa
H-Torque Elastomer Torque @ Max Diff Pressure	9785 lbs-ft / 13307 N.m

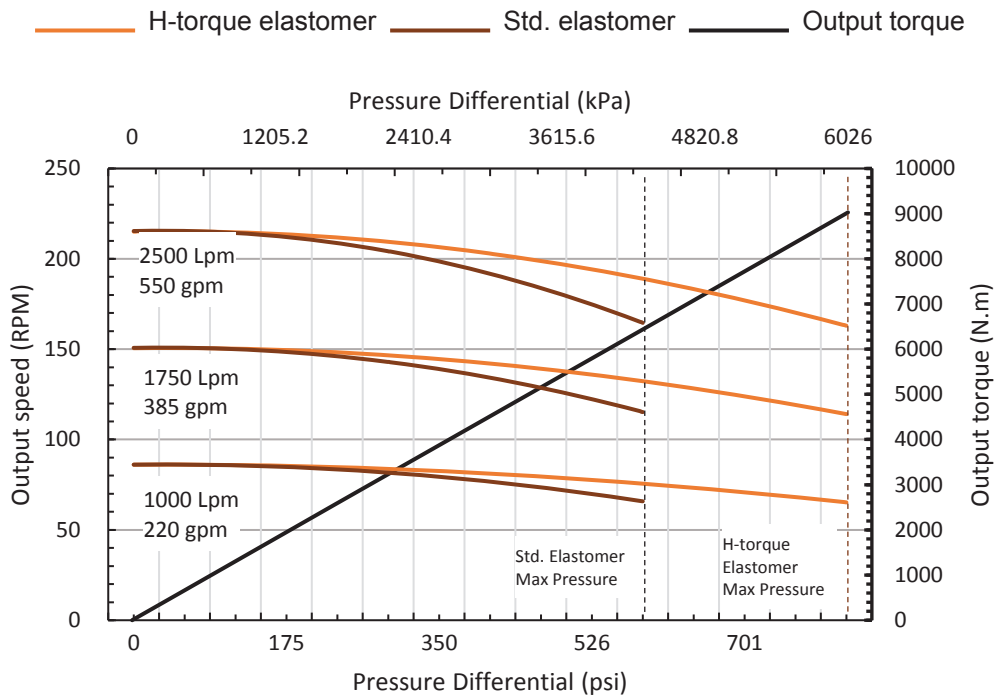

The performance curves are for reference only, there are some differences from the actual situation depending on the temperature, stator/rotor fit and mud. Performance data and dimensions subject to change without notice. The motor life will reduce rapidly if you operating a motor near or above maximum differential pressure.