


7 1/4" 7/8 5.0 Stages Model Number: 7257850



Motor Specification	Metric	Imperial
Total length	L	7970 mm / 313.7 in
Max OD of Slick Motor	D	185 mm / 7.25 in
Bit to Bent Point	Lb	1565 mm / 61.6 in
Max OD of Stabilizer	Ds	248 mm / 9.7 in
Bit to Center of Stabilizer Blade	Ls	556 mm / 21.8 in
Estimated Total Weight		1380 KG / 3042.9 lbs
Bit Size Range		213-251 mm / 8 3/8-9 7/8 in
Common Top Connection		4-1/2 REG Box
Common Bottom Connection		6-5/8 REG Box

Power Section Performance Data		
Flow Rate	1100-2700 lpm	291-713 gpm
Revs per Unit Volume	0.074 rev/l	0.281 rev/g
Speed Range	81-201 rpm	
Std. Elastomer Max Diff Pressure	804 psi	5543 kPa
Std. Elastomer Torque @ Max Diff Pressure	7365 lbs-ft	10016 N.m
H-Torque Elastomer Max Diff Pressure	1097 psi	7563 kPa
H-Torque Elastomer Torque @ Max Diff Pressure	9844 lbs-ft	13387 N.m

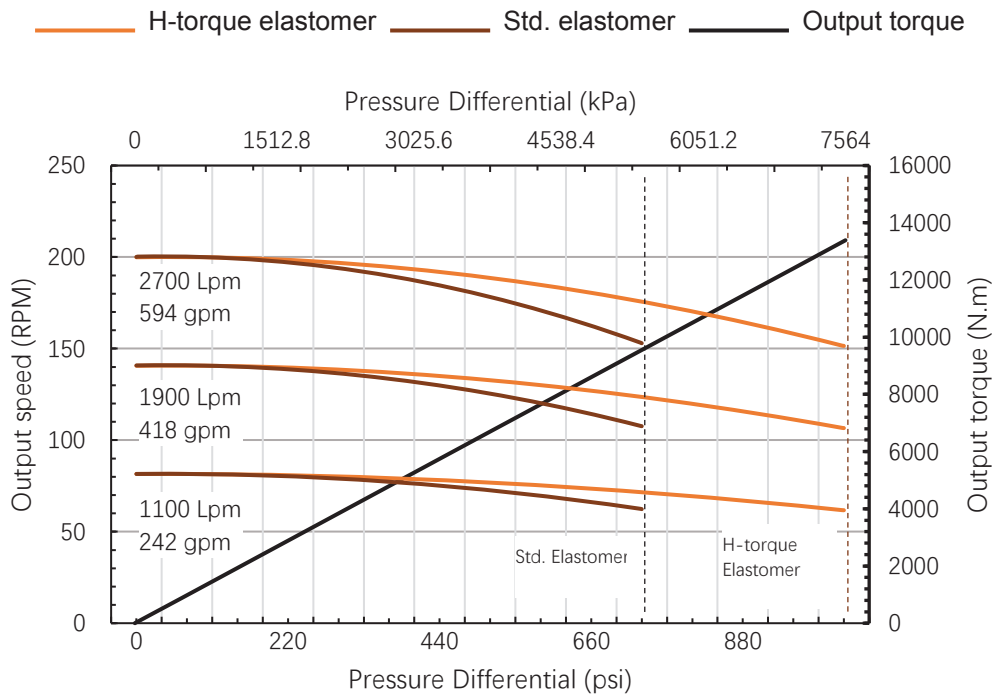

The performance curves are for reference only, there are some differences from the actual situation depending on the temperature, stator/rotor fit and mud. Performance data and dimensions subject to change without notice. The motor life will reduce rapidly if you operating a motor near or above maximum differential pressure.