


7 3/4" 5/6 5.0 Stages Model Number: 775650



Motor Specification	Metric	Imperial
Total length	L	7962 mm / 313.4 in
Max OD of Slick Motor	D	196.8 mm / 7.75 in
Bit to Bent Point	Lb	1830 mm / 72 in
Max OD of Stabilizer	Ds	308 mm / 12.1 in
Bit to Center of Stabilizer Blade	Ls	850 mm / 33.4 in
Estimated Total Weight		1450 KG / 3197.2 lbs
Bit Size Range		213-251 mm / 8 3/8-9 7/8 in
Common Top Connection		5-1/2 REG Box
Common Bottom Connection		6-5/8 REG Box

Power Section Performance Data		
Flow Rate	1300-3000 lpm	343-793 gpm
Revs per Unit Volume	0.074 rev/l	0.281 rev/g
Speed Range	96-223 rpm	
Std. Elastomer Max Diff Pressure	804 psi	5543 kPa
Std. Elastomer Torque @ Max Diff Pressure	7345 lbs-ft	9989 N.m
H-Torque Elastomer Max Diff Pressure	1097 psi	7563 kPa
H-Torque Elastomer Torque @ Max Diff Pressure	10016 lbs-ft	13621 N.m

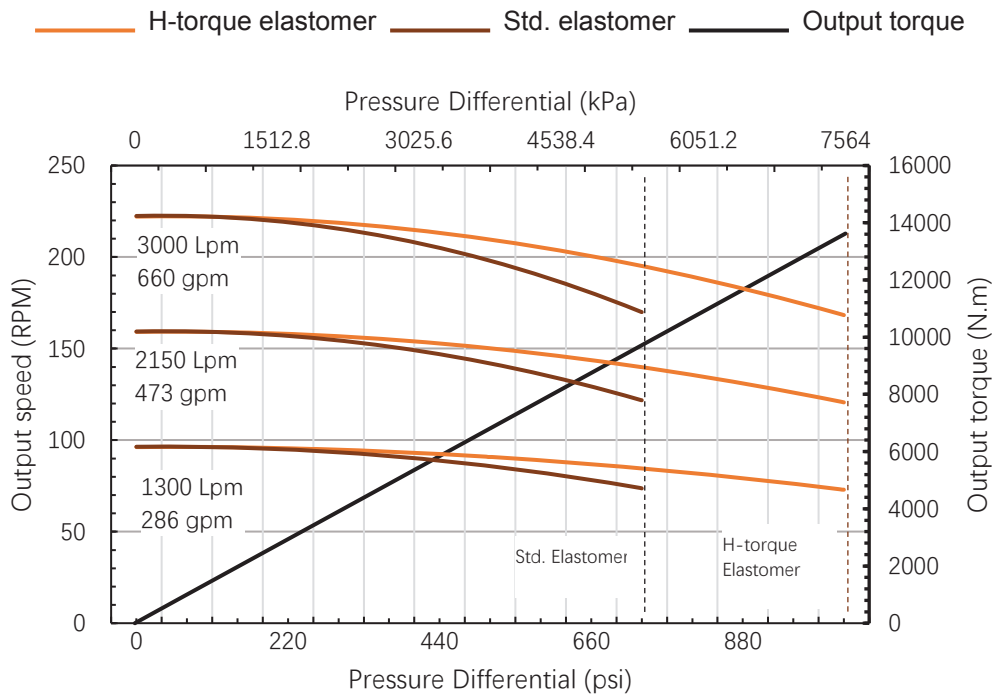

The performance curves are for reference only, there are some differences from the actual situation depending on the temperature, stator/rotor fit and mud. Performance data and dimensions subject to change without notice. The motor life will reduce rapidly if you operating a motor near or above maximum differential pressure.